FIBER TERMINATION BOX (ABS)
4 Ports

KABEX®

DESCRIPTION

Fiber Termination Box provides a high density wall-mounted solution for next generation networks, which aims to provide and manage maximum numbers of fiber termination in a limited space. It is normally installed outdoor and wall-mounted

FEATURES

- Waterproof design with IP*65 protection level
- Integrated with splice cassette and cable management tools
- Manage small and large quantities of fiber with a high packing density
- Easy to maintain and extend the capacity
- Fiber bend radius control more than 40mm
- Suitable for the fusion splice or mechanical splice
- FC or SC are both available
- 1*4 PLC Splitter can be installed as an option
- Efficient cable management
- Burglarproof padlock

STANDARD CONFIGURATION

- Splice cassette and cable management tools
- Installation nuts and bolts
- Protective sleeves
- Hose clamps
- Rubber seal for cable entrance

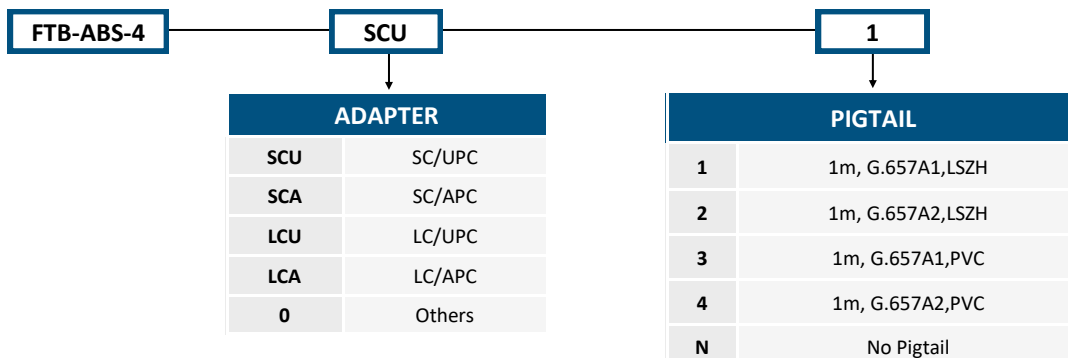## OPTIONAL CONFIGURATION

- FBT Splitter

TESTED BY	APPROVED BY	
SIRIM	TM	IP65

SPECIFICATIONS

Dimension (mm) LxWxH	186 x 116 x 40
Material	ABS+PC
Color	White
Empty Weight (g)	450
Fully Loaded Weight (g)	500

ORDERING INFORMATION

| FTB-ABS-4 | — | SCU | — | 1 |

ADAPTER	
SCU	SC/UPC
SCA	SC/APC
LCU	LC/UPC
LCA	LC/APC
0	Others

PIGTAIL	
1	1m, G.657A1,LSZH
2	1m, G.657A2,LSZH
3	1m, G.657A1,PVC
4	1m, G.657A2,PVC
N	No Pigtail

Note : Specifications are subject to change without notice