


DESCRIPTION

Field Assembly SC type connector for bend insensitive SM fiber drop cable or indoor cable. The two fiber drop/indoor cable shall be applicable for this connector if one fiber is used and other fiber must be cut at the cable jacket end. This connector is not applicable to the loose cable

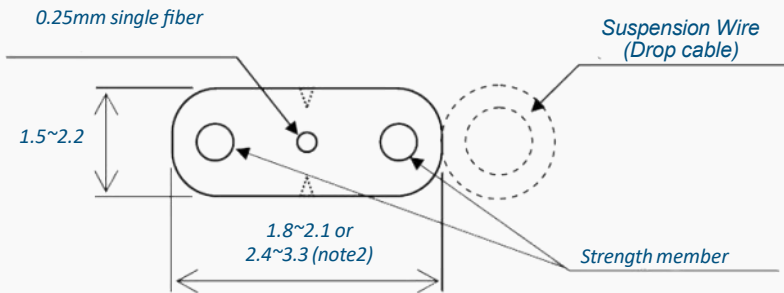

Note 1 : Bend insensitive SM fiber must comply with ITU-T.G.652B, G652D and G652A. Allowable fiber diameter is 0.25+/-0.015mm.

Note 2 : In case of drop cable, the messenger wire must be removed before installation.

SPECIFICATIONS

Characteristic	Parameter
Fiber Cleaver	Yes
Operating Temperature	-40 ~ 75°C
Insertion Loss (Wavelength : 1310/1550nm)	Max. 0.3dB
Return Loss (Wavelength : 1310/1550nm)	Min50dB
Allowable Tensile Strength	10N
Allowable Connector Mating	500 times
Packing Unit	Each connector and spare Cable holder is packaged in a PE bag individually. 100 connectors, an Assembly guide jig, an E-SC Cut Spacer, a spare Cable holder and an instruction manual are packaged in a middle size of a PE bag.
Composition and Construction	1x Connector plug with wedge plate and cable holder (M) Spare cable holder (M) Assembly guide jig E-SC Cut Spacer Instruction Manual

ORDERING INFORMATION

Part No	Description
SMF (End Face: UPC)	YZS1823098