



FLAP BARRIER




DESCRIPTION

The barrier are used for automated human access; installed in areas such as railway platforms, passenger terminals, ferry ports, airport, checkpoints, factories and stadiums. They can be integrated with ticketing systems and card readers to ensure quick and automated clearance.

KABEX®

SPECIFICATIONS

Drive System	Incorporate a DC motor drive Motor is cut off during inactive state saving power consumption and prevent overheating. Auto release of flaps into open position can be configured in the event of power failure or remain in closed position
Housing	Customized for card readers, Access Controls, LED Signage, Ticket Collector, etc
Material	SS304 (Optional SS316 and EG Plated Powder Coated)
LED Arrow/Cross Sign	Super Bright LED Arrow/Cross signage
Rated Current	Typical : 0.5A Inrush : 2.0A
Input Voltage	230V, 50Hz
Mechanical	Open/Close time : <0.5 Sec
Interface I/O	Open/Close/Manual Open/Fire Alarm/Gate Status Output Digital Usage Counter
Safety	Photo Electric Beams installed as standard for all Models
Optional	Tailgate Sensors, Anti-crawl Sensors

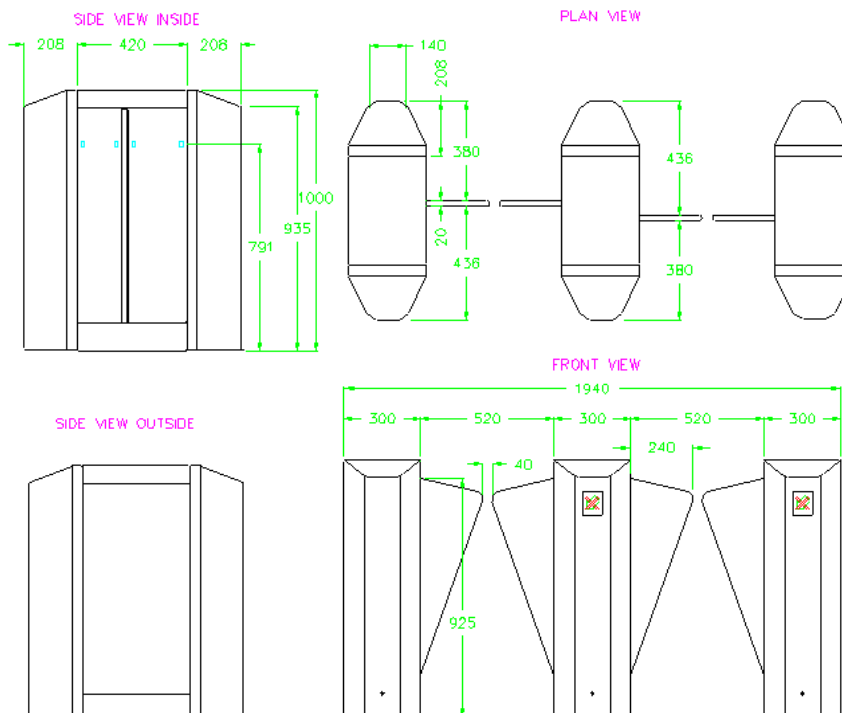

KUMPULAN ABEX SDN BHD

ORDERING INFORMATION

EXAMPLE : FB-C30411-DC

