FIBER TERMINATION BOX (ABS)

12-24 Ports (Pole)





DESCRIPTION

Fiber Termination Box provides a high density wall-mounted solution for next generation networks, which aims to provide and manage maximum numbers of fiber termination in a limited space. It is normally installed outdoor and wall-mounted

FEATURES

- Waterproof design with IP*65 protection level
- Integrated with splice cassette and cable management tools
- Manage small and large quantities of fiber with a high packing density
- Easy to maintain and extend the capacity
- Fiber bend radius control more than 40mm
- Suitable for the fusion splice or mechanical splice
- Capacity of fiber up to 24 ports
- FC or SC are both available
- 1*8 or 1*4 PLC Splitter can be installed as an option
- Efficient cable management
- Burglar-proof padlock
- 24 ports cable entrance for drop cable

STANDARD CONFIGURATION

- Splice cassette and cable management tools
- Installation nuts and bolts
- Protective sleeves
- Hose clamps
- Rubber seal for cable entrance



OPTIONAL CONFIGURATION


• FBT Splitter

SPECIFICATIONS

Dimension (mm) LxWxH	385 x 320 x 120
Material	ABS+PC
Color	White
Empty Weight (kg)	4
Fully Loaded Weight (kg)	6.8

ORDERING INFORMATION

Example: FTB-ABSPC-12SCU1

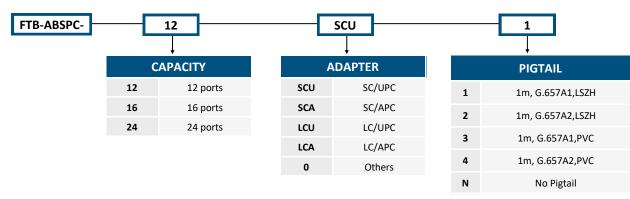

Note: Specifications are subject to change without notice

Rev No : K-01 9 Printed Date : 13/12/2023