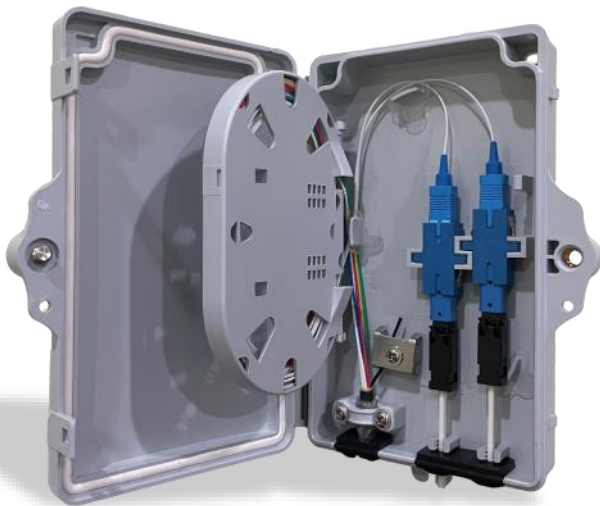# FIBER TERMINATION BOX (ABS)
2 Ports

KABEX®

DESCRIPTION

Fiber Termination Box provides a high density wall-mounted solution for next generation networks, which aims to provide and manage maximum numbers of fiber termination in a limited space. It is normally installed outdoor and wall-mounted

FEATURES

- Waterproof design with IP*65 protection level
- Integrated with splice cassette and cable management tools
- Manage small and large quantities of fiber with a high packing density
- Easy to maintain and extend the capacity
- Fiber bend radius control more than 40mm
- Suitable for the fusion splice or mechanical splice
- LC or SC are both available
- Efficient cable management
- Burglar-proof padlock

STANDARD CONFIGURATION

- Splice cassette and cable management tools
- Installation nuts and bolts
- Protective sleeves
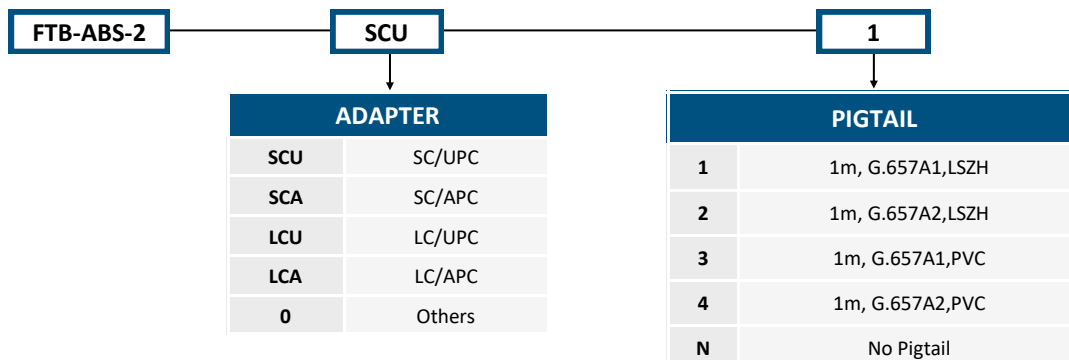- Hose clamps
- Rubber seal for cable entrance

TESTED BY SIRIM | **APPROVED BY** TM | IP65

SPECIFICATIONS

Dimension (mm) LxWxH	167 x 102 x 37
Material	ABS+PC
Color	White
Empty Weight (g)	320
Fully Loaded Weight (g)	330

ORDERING INFORMATION

Example : FTB-ABS-2SCU1

FTB-ABS-2	—	SCU	—	1

ADAPTER	
SCU	SC/UPC
SCA	SC/APC
LCU	LC/UPC
LCA	LC/APC
0	Others

PIGTAIL	
1	1m, G.657A1,LSZH
2	1m, G.657A2,LSZH
3	1m, G.657A1,PVC
4	1m, G.657A2,PVC
N	No Pigtail

Note : Specifications are subject to change without notice

ABEX KUMPULAN ABEX SDN BHD   +603 5192 2898 | sales@kabex.com.my | www.kabex.com.my